

tuya[®].com



Global Trade Platform For Smart Products

Security & Compliance



Powered By



Make your home a little more livable and a lot more automated by adding appliances and devices you can control from anywhere.



Smart Electrical, Power with Intelligence

Directly connect to global factories
Build your ecosystem with smart electrical products



PENGUIN SAFEGUARD
3D INFRARED FACE DIGITAL LOCK DF14
20240186



PENGUIN TUYA G49 SMART
LOCK (SINGLE LATCH)
20230059



PENGUIN TUYA G49-2 SMART
LOCK (DOUBLE LATCH)
20230060



TUYA ALUMINIUM DIGITAL
LOCK BLACK
20220456



TUYA ALUMINIUM DIGITAL
LOCK SILVER
20220457



TUYA WIFI SMART
CURTAIN DRIVER
20220450



TUYA WIFI SURVEILLANCE
DOOR BELL
20220449



TUYA WIFI DOOR &
WINDOW SENSOR
20220458



TUYA HFWS DOOR
BELL BS15
20240158



TUYA SOLAR WIFI CAMERA
PTZ 360 DEGREE #BS16 WHITE
20240159



TUYA SOLAR WIFI CAMERA
OUTDOOR #BS5 WHITE
20210890



TUYA SOLAR WIFI CAMERA
OUTDOOR #S5 WHITE
20210889



TUYA WIFI 2MP E27
360DEG CAMERA
20220464



TUYA WIFI 2MP 360DEG
HOME CAMERA
20220465



TUYA WIFI CARBON
MONOXIDE DETECTOR
20220447



TUYA WIFI & MANUAL
SWITCH CONTROLLER 16A
20220448



TUYA WIFI GAS
DETECTOR
20220376



TUYA WIFI ALARM SIREN
WITH FLASH
20220619



TUYA WIFI SMOKE
DETECTOR
20220375



TUYA WIFI 7 COLORS
SMART BULB
20220462



TUYA WIFI HOME
ALEXA S06
20220649



TUYA WIFI
SMART SOCKET
20220094



KAISEN AUTOGATE

Distributed by



Specification Chart

Kaisen Autogate

Power Supply	220V/50Hz AC
Starting Current	3A;
Running Speed	12m/min
Environment Temperature	-25C° ~ +55°C
Motor Power	550W/750W/1200W
Motor Speed	1400r/min
Motor Weight	12.7 - 16.7 kg
Suitable door weight	800kg/1200kg/2000kg

T329 Control Board for Sliding Opener (AC220V)


Input voltage: **AC220V** /50Hz + - /10%

Maximum Current :5A

Fuse: 10A

Remote control distance : open land > 30 M

Control panel interface and function use

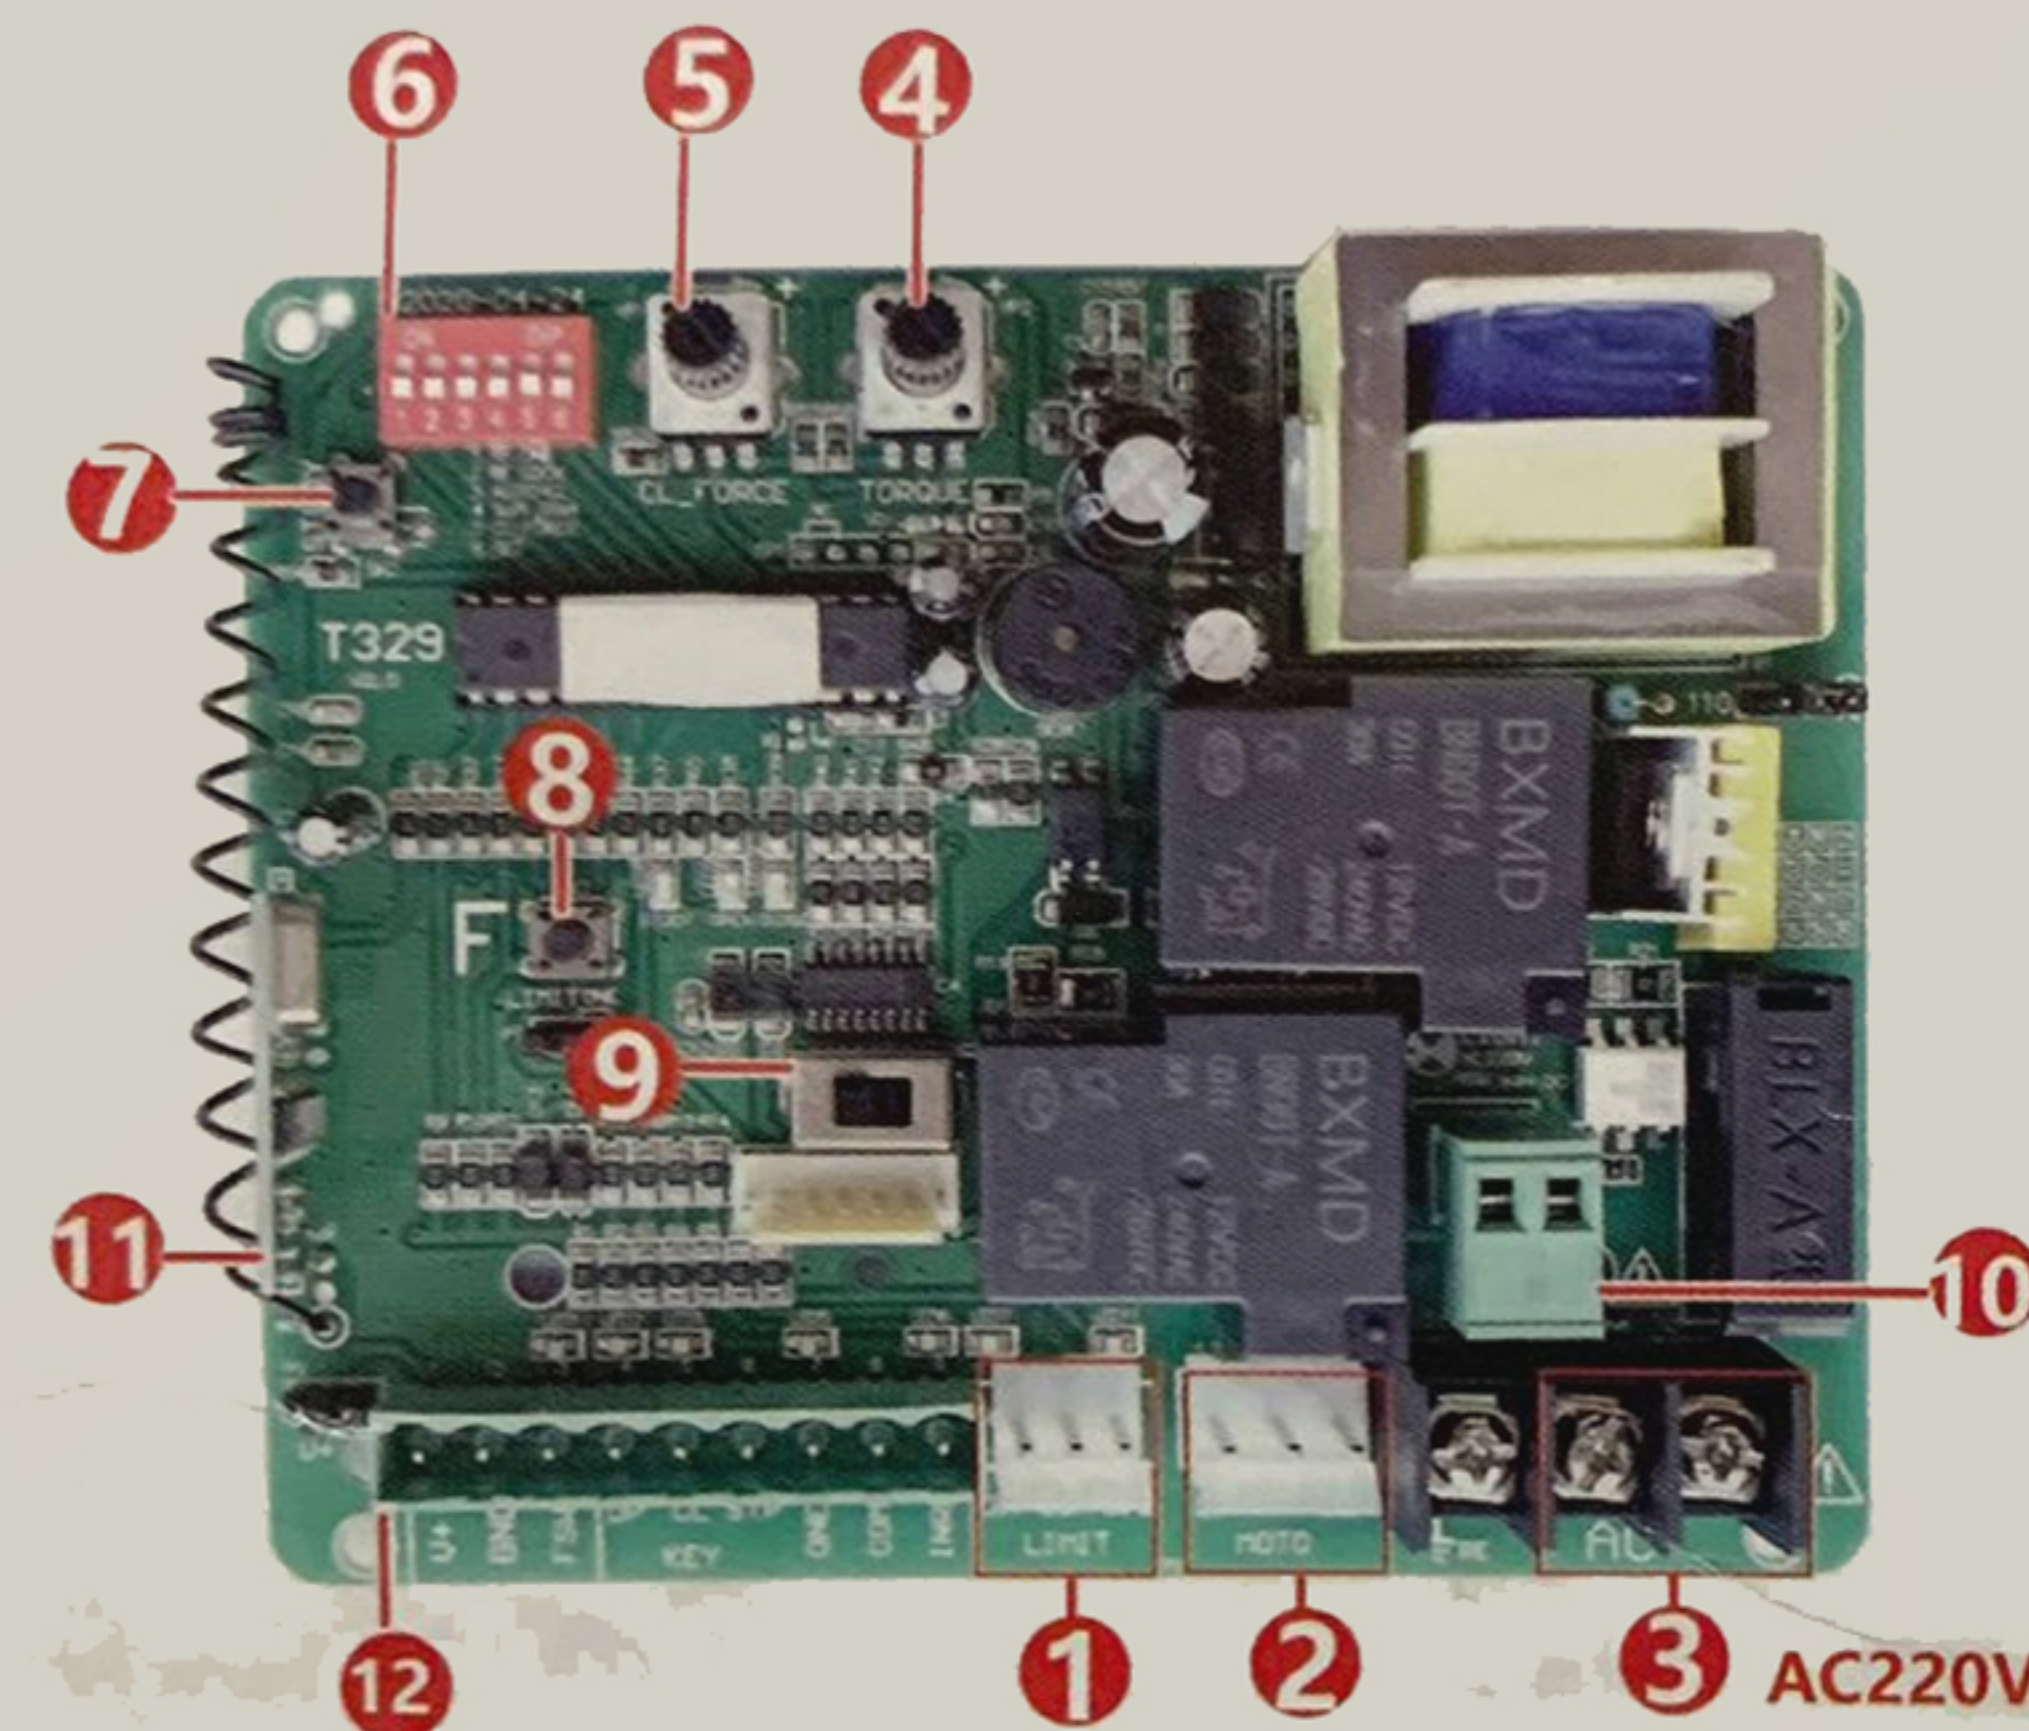

1. Limit line (O.P COM C.L)
2. Motor line (L1 COM L2)
3. Supply power : **AC220V** + - 10%
4. TORQUE adjustable
5. CL_FORCE adjustable
6. FUNCTION SET **B1** RF ONE → single button on remote **B2** RF LOCK → remote manual lock function **B3** AUTO CL → automatic close **B4** Soft start **B5** CL_FORCE → Encountered obstacle return **B6** SET

7. Remote control STUDY key

8. F key is manual cycling switch , OPEN-STOP-CLOSE- STOP


9. Adjust the motor direction turn left or turn right

10. **AC220V** Light interface

11. Receiving module of remote and antenna

12. Optional accessories interface ,such as manual switch , infrared sensor, keypad access system and so on .

Motor Wiring Diagram

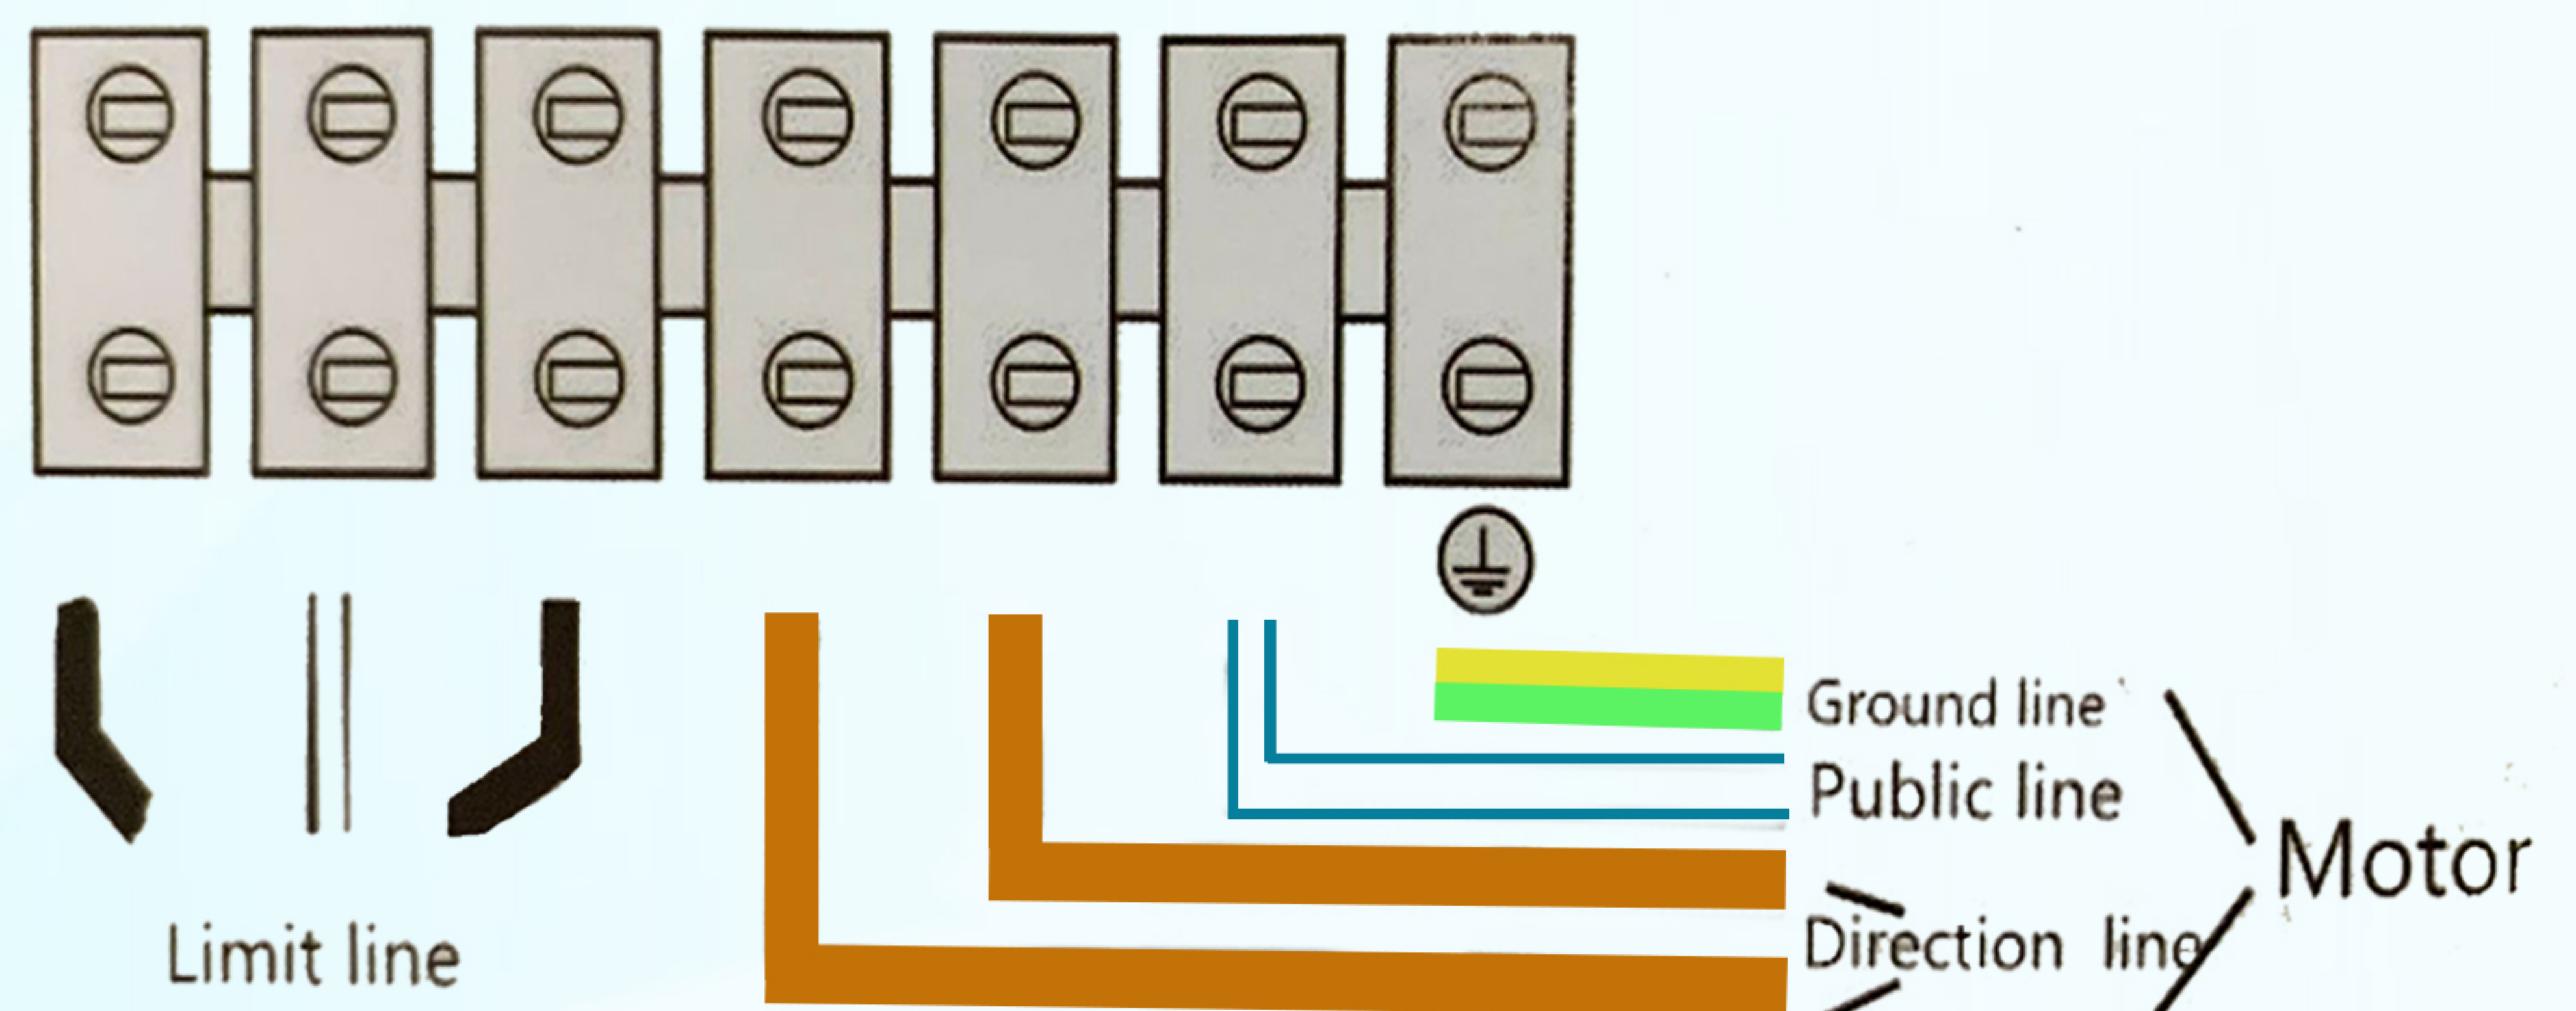

Controller connection, please read the controller specification

Remote Control



Manual key



Sliding Gate Opener Installation Schematic Diagram

